

CODE NUMBER

24501420

DESCRIPTION

ST-2459 Water Closet and SLOAN 111 SFSM Flushometer.

COMPONENTS

Flushometer: Code 3780038Water Closet: Code 2102459

DETAILS

• Flush Volume: 1.28 gpf (4.8 Lpf)

Nominal Dimensions: 26 ³/₄" × 15" × 13 ¹/₄" (679 × 381 × 337mm)

FLUSHOMETER FEATURES

- True Mechanical Override Flush Button
- Four (4) size C batteries included
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- 72-Hour Sentinel Flush
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- No External Volume Adjustment to Ensure Water Conservation
- Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance

FIXTURE FEATURES

- White Vitreous China
- Elongated bowl
- Wall mounted, wall outlet
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer

Code 24501420 • Downloaded 08/05/25 • Revised 04/28/25 • View Latest Version

- Static load rating of 750 lbs (see Notes)
- Water spot area: 101/8" x 93/8" (26 cm x 24 cm)
- 1½" I.P.S. top spud inlet
- 21/8" fully glazed trapway
- Toilet seat not included
- Static load rating of 750 lbs. (See Notes)



COMPLIANCES & CERTIFICATIONS

























(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Certified, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WaterSense Listed, WELL Building Standard)

DOWNLOADS

- EBV-500/550-A Installation Instructions
- HET Wall Hung Installation Instructions
- Sloan Exposed Installation Instructions
- EBV500/EBV550 Repair and Maintenance Guide
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Sloan Flushometer Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


Static load tested according to the procedure outlined in Section 6.7 of ASME A112.19.2. Not recommended for bariatric use.

WARRANTY


View Warranty Information



ROUGH-IN

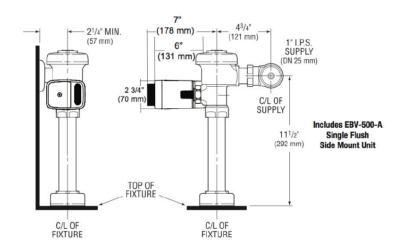

NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.



Designed to meet ADA standards when bowl is 17" - 19" high including seat